



## SEPRO HORIZONTAL SCREENS

### APPLICATIONS

- Dewatering
- Fine Sizing
- Coarse Sizing


### ADVANTAGES

- High capacity
- High frequency linear stroke
- Low profile screen box design for minimum head room requirements
- Trunnion suspension with heavy duty coil springs
- Directly driven by reliable vibrator motors
- Interchangeable screen decks with a variety of screen media options
- Easy deck angle changes
- Possible horizontal or up-hill installation
- Extra rugged screen construction for heavy load operation
- Fabricated from mild steel with huck bolt type fasteners
- Dual and quad vibrating type motors
- Steel coil vibrating isolating plugs
- 305mm x 305mm standard poly urethane pin and sleeve type screen panels
- Rubber lined discharge lip and cross beams
- Local electrical disconnect
- Spray bar assemblies with poly urethane spray nozzles
- Removable end caps and individual shut off valve

### HIGH CAPACITY EQUIPPED WITH INTERCHANGEABLE SCREEN DECKS

**Sepro Horizontal Screens** are used for a variety of particle size separation and scalping and dewatering duties in mineral processing and aggregate applications.

In mineral processing applications, particle size separation is of utmost importance in order to optimize crushing, grinding and gravity separation as well as many other processes. In aggregate applications, proper size separation and dewatering is essential to generate a saleable product. Sepro works closely with clients to determine the correct screen type and size for each application.

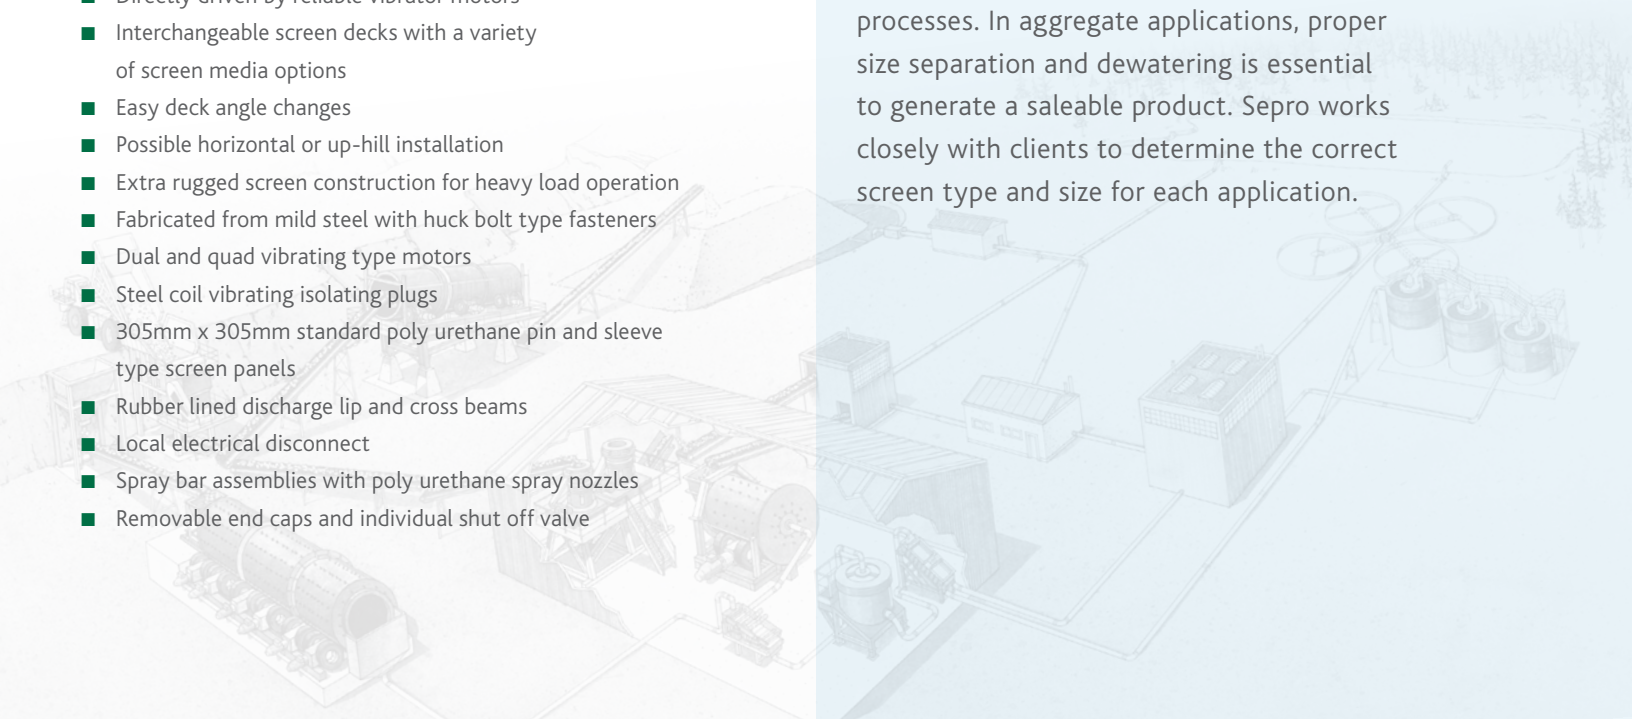



# SEPRO HORIZONTAL SCREENS

## STANDARD HORIZONTAL SCREEN SIZES

SCREEN SIZE m (ft)	MOTOR kW (hp)
HB 1.2 x 3.6 (4' x 12') – Dewatering	2 x 8.5 (11.4)
HB 1.2 x 3.6 (4' x 12') – Sizing – Fine	2 x 5.0 (6.7)
HB 1.2 x 3.6 (4' x 12') – Sizing – Course	2 x 7.5 (10.1)
HB 1.5 x 3.6 (5' x 12') – Dewatering	2 x 9.4 (12.6)
HB 1.5 x 3.6 (5' x 12') – Sizing – Fine	2 x 8.0 (10.7)
HB 1.5 x 3.6 (5' x 12') – Sizing – Course	2 x 7.5 (10.1)
HB 1.8 x 3.6 (6' x 12') – Dewatering	2 x 10.5 (14.1)
HB 1.8 x 3.6 (6' x 12') – Sizing – Fine	2 x 9.5 (12.7)
HB 1.8 x 3.6 (6' x 12') – Sizing – Course	2 x 8.0 (10.7)

SCREEN SIZE m (ft)	MOTOR kW (hp)
HB 1.8 x 4.8 (6' x 16') – Dewatering	2 x 14.5 (19.4)
HB 1.8 x 4.8 (6' x 16') – Sizing – Fine	2 x 14.2 (19.0)
HB 1.8 x 4.8 (6' x 16') – Sizing – Course	2 x 11.0 (14.8)
HB 2.1 x 4.8 (7' x 16') – Dewatering	2 x 14.5 (19.4)
HB 2.1 x 4.8 (7' x 16') – Sizing – Fine	2 x 14.2 (19.0)
HB 2.1 x 4.8 (7' x 16') – Sizing – Course	2 x 11.0 (14.8)
HB 2.4 x 4.8 (8' x 16') – Dewatering	4 x 10.5 (14.1)
HB 2.4 x 4.8 (8' x 16') – Sizing – Fine	4 x 9.5 (12.7)

*Note: Specifications are job/project dependent and/or application specific.  
Please check with Sepro sales representative.*

## OPTIONS

- Discharge Chute
- Underpan
- Stand/Skid
- Spray Bars
- Electronic Controls



Sepro Mineral Systems Corp.  
 9850 201 Street, Langley, British Columbia, Canada V1M 4A3  
 Office: +[1] 604.888.5568 • Fax: +[1] 604.888.5521 • Toll free: +[1] 800.990.5568 North America  
 sepro@seprosystems.com • www.seprosystems.com

