



SEPRO ROD DECK SCREENS

APPLICATIONS

- Effective screening of wet, sticky, abrasive materials in mineral, sand and gravel processing
- Wood waste recycling
- Construction and demolition waste


KEY ADVANTAGES

- Adjustable rod spacing with 1³/₈" (35 mm) heavy duty forged tines, tines set in polyurethane blocks for shock (impact) resistance
- Dual vibrating motors provide high G force 2 x 11 kW (15 HP)
- Adjustable installation angle 12–15 degrees
- Large open area provides for high capacity
- Expanded spacing between decks allowing for improved access for maintenance
- Approximate weight 4800 kg

HIGH CAPACITY SCREENING SOLUTIONS

Sepro Rod Deck Screens are used for a variety of heavy duty scalping and sizing duties in mineral processing and aggregates applications.

DIMENSIONS

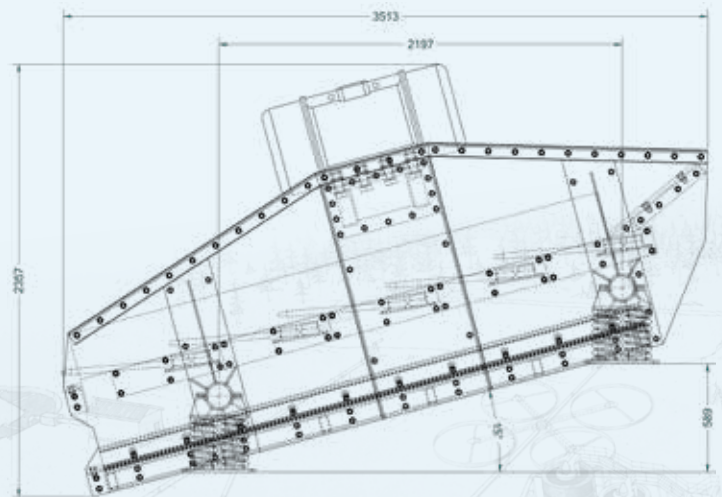

5' x 10' (1.5 m x 3.0 m) Rod Deck Screen, dimensions in mm.

Sepro Mineral Systems Corp.
 9850 201 Street, Langley, British Columbia, Canada V1M 4A3
 Office: +[1] 604.888.5568 • Fax: +[1] 604.888.5521
 Toll free: +[1] 800.990.5568 North America
 sepro@seprosystems.com • www.seprosystems.com

